
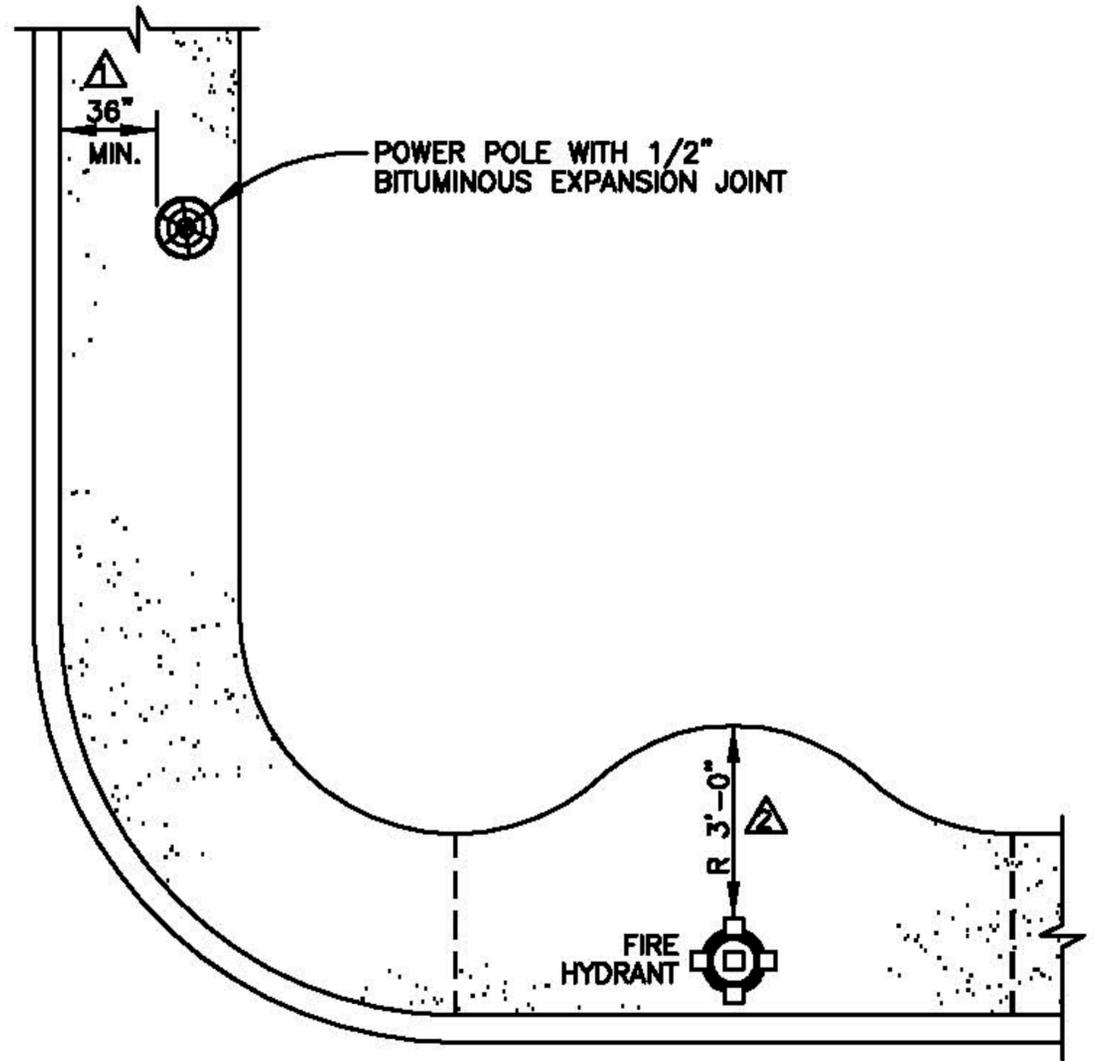


NOTES

1. FOR SIDEWALK CONSTRUCTION DETAILS, SEE STANDARD 313
2. PROVIDE 1/2" PREFORMED BITUMINOUS EXPANSION JOINT MATERIAL AROUND ALL POWER POLES & FIRE HYDRANTS WITHIN THE SIDEWALK AREA

△ 36" (MIN.) OR PAVED AS SHOWN BELOW

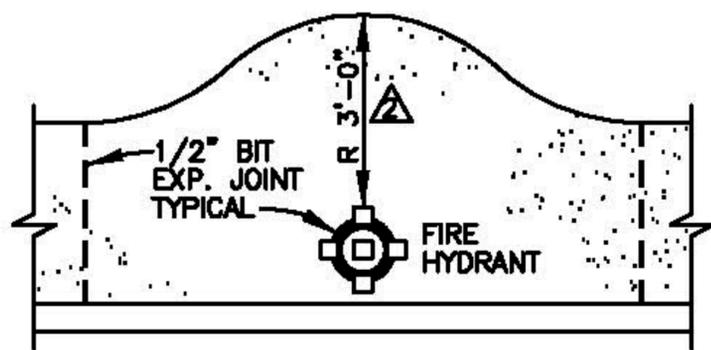

REV.	DATE
△	12/9/02
△	11/30/05

CONSTRUCTION
STANDARDS

PAVING
SIDEWALK OBSTRUCTIONS

STANDARD No. D-318 SHEET 1 OF 1

CITY OF
AZTEC
PUBLIC WORKS
DEPARTMENT