



NOTES

DESIGN SPEED	WIDTH	CROWN TRANSITION RATE
35 MPH	10'	1:150
35 MPH	12'	1:150
50 MPH	16'	1:200


1. VALLEY GUTTERS SHOWN IN THIS DRAWING ARE TO BE USED WHERE THERE IS A NON-STOPPING CONDITION FOR VEHICLES CROSSING THE VALLEY GUTTER.
2. VALLEY GUTTERS ARE NOT TO BE USED AS STANDARD DESIGN FOR CROSSING WATER ACROSS COLLECTOR OR ARTERIAL ROADWAYS UNLESS THERE IS NO ALTERNATIVE.
- ①3. CONCRETE FOR ALL VALLEY GUTTERS WILL HAVE A MIN. COMPRESSIVE STRENGTH OF 3000 PSI IN 24 HOURS.

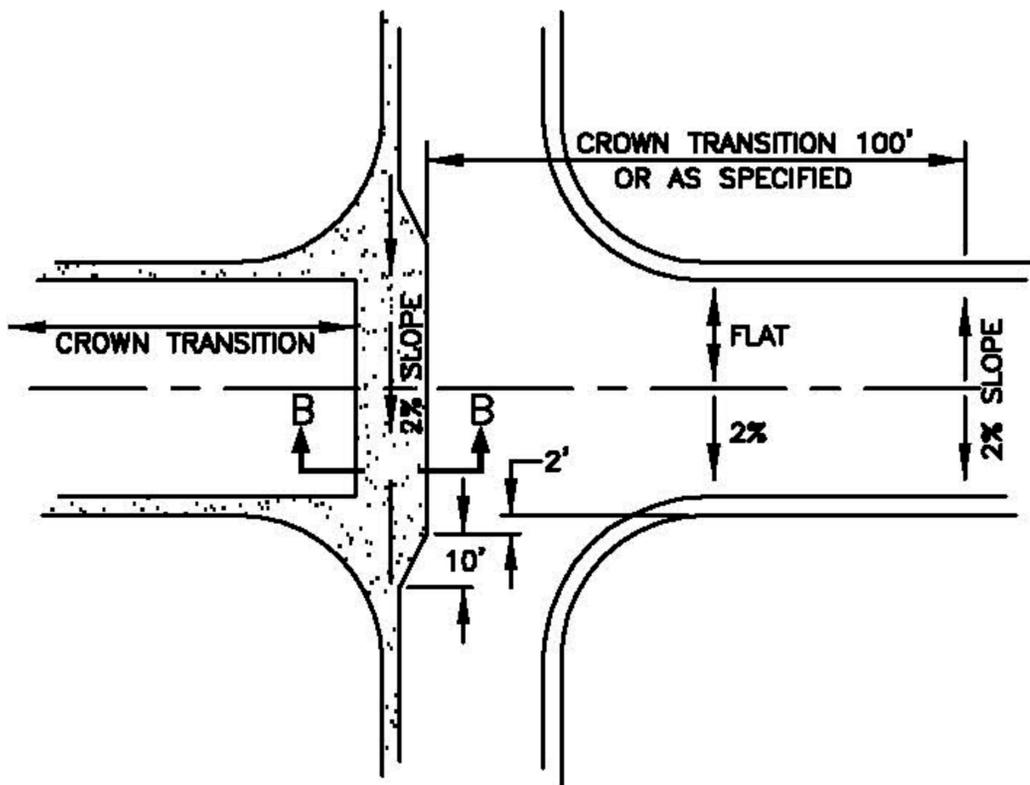


HIGHER SPEED ROADWAY

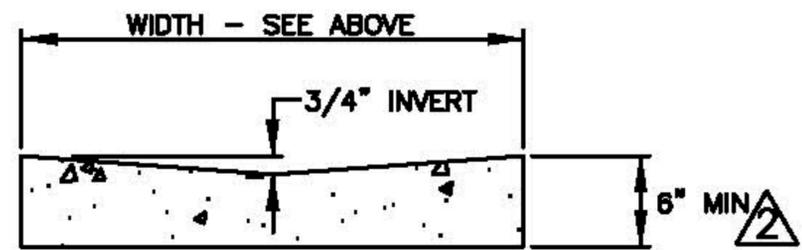

SECTION B-B

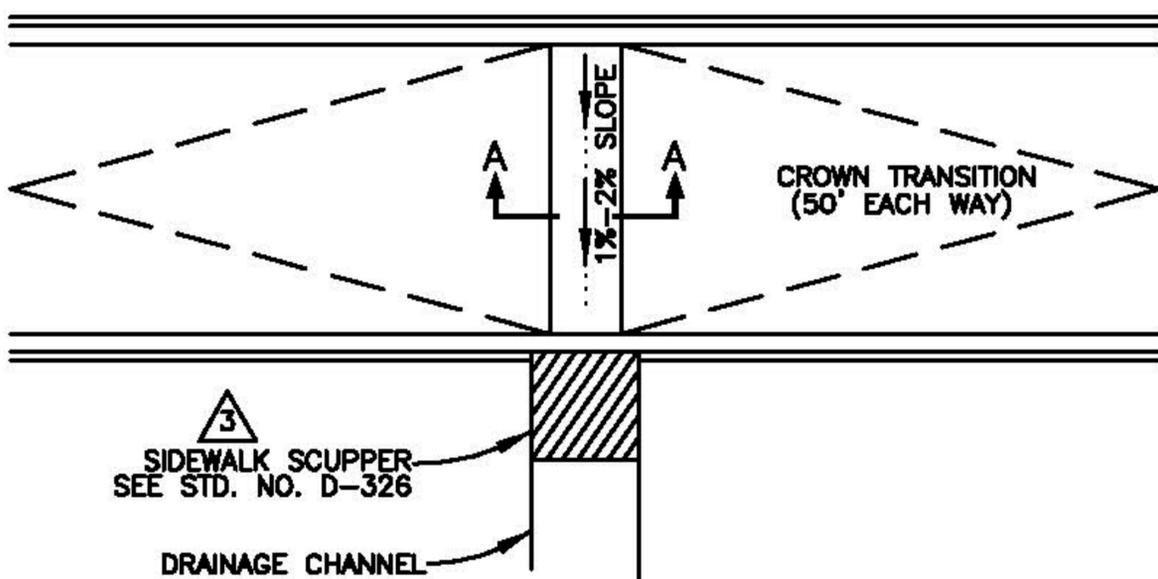

LOCAL STREET

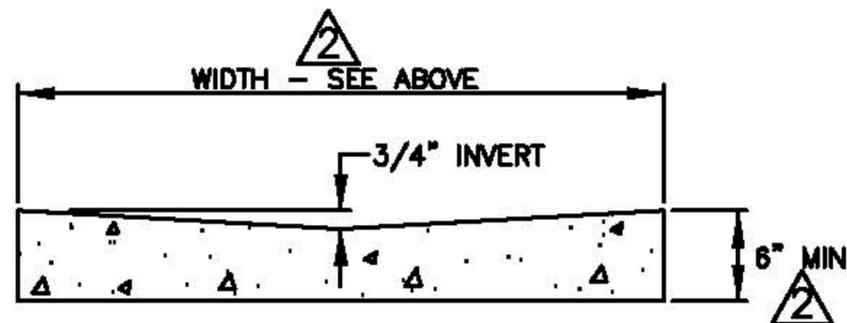

SECTION A-A

③
SIDEWALK SCUPPER
SEE STD. NO. D-326

DRAINAGE CHANNEL

REV.	DATE
①	11/6/90
②	01/07/04
③	12/16/04

CONSTRUCTION
STANDARDS

PAVING - SPECIAL VALLEY GUTTERS

STANDARD No. D-324 SHEET 1 OF 1

CITY OF
AZTEC
PUBLIC WORKS
DEPARTMENT