


VAN ACCESSIBLE PARKING SPACES SHALL HAVE AN ADDITIONAL SIGN MOUNTED BELOW THE ACCESSIBLE PARKING SIGN UNLESS ALL THE ACCESSIBLE PARKING SPACES COMPLY WITH THE STANDARDS FOR VAN ACCESSIBLE PARKING.

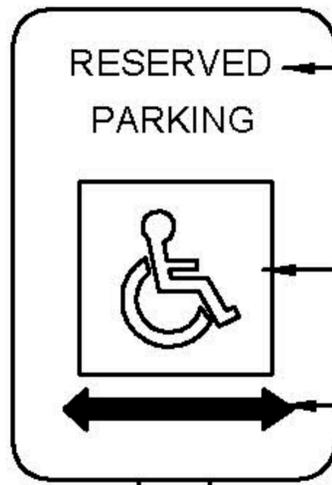

GREEN LETTERING ON WHITE BACKGROUND

R7-8  
12" X 18"

BLUE SYMBOL

GREEN ARROW(S) AS APPROPRIATE



BLACK LETTERING ON WHITE BACKGROUND SIGN OPTIONAL





R7-8A  
12" X 9"

STURDY POST

5 FEET MINIMUM TO BOTTOM OF ANY SIGNAGE

40" MIN.

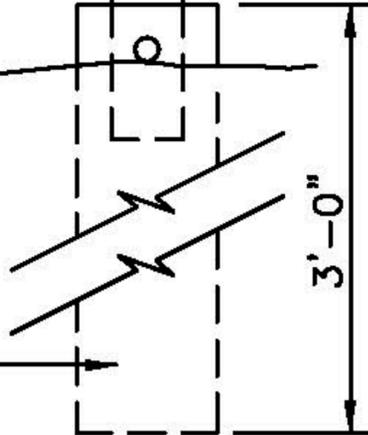

ANCHOR

NOTES

1. SIGNS SHALL CONFORM TO THE STANDARDS OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES."
2. SIGNS SHALL BE SET DIRECTLY FACING THE LINE OF TRAVEL FOR THE VEHICLE ENTERING THE STALL (NOT < 45°)
3. SIGNS SHALL BE MOUNTED ON A STURDY POST AT THE HEIGHT SPECIFIED HERE IN, OR MAY BE SECURELY BOLTED TO AN ADJACENT WALL
4. EACH SPACE SHALL BE POSTED WITH A SIGN, CENTERED ON THE STALL, HOWEVER, ONE SIGN MAY BE USED BETWEEN THE TWO SPACES WITH THE APPROPRIATE ARROWS
5. 40" MIN. FROM FACE OF ADJACENT CURB OR BUMPER BLOCK


ACCESSIBLE PARKING SIGNS ARE AVAILABLE FROM THE BUILDING INSPECTION DIVISION AT COST AND ARE IN STOCK.  
TELEPHONE 599-1304.  
HOURS: 8:00 AM TO 12:00 PM AND 1:00 PM TO 5:00 PM MONDAY THROUGH FRIDAY.

CONSTRUCTION STANDARDS

ACCESSIBLE PARKING SIGN DETAIL

STANDARD No. D-603 SHEET 1 OF 3


CITY OF AZTEC  
PUBLIC WORKS DEPARTMENT

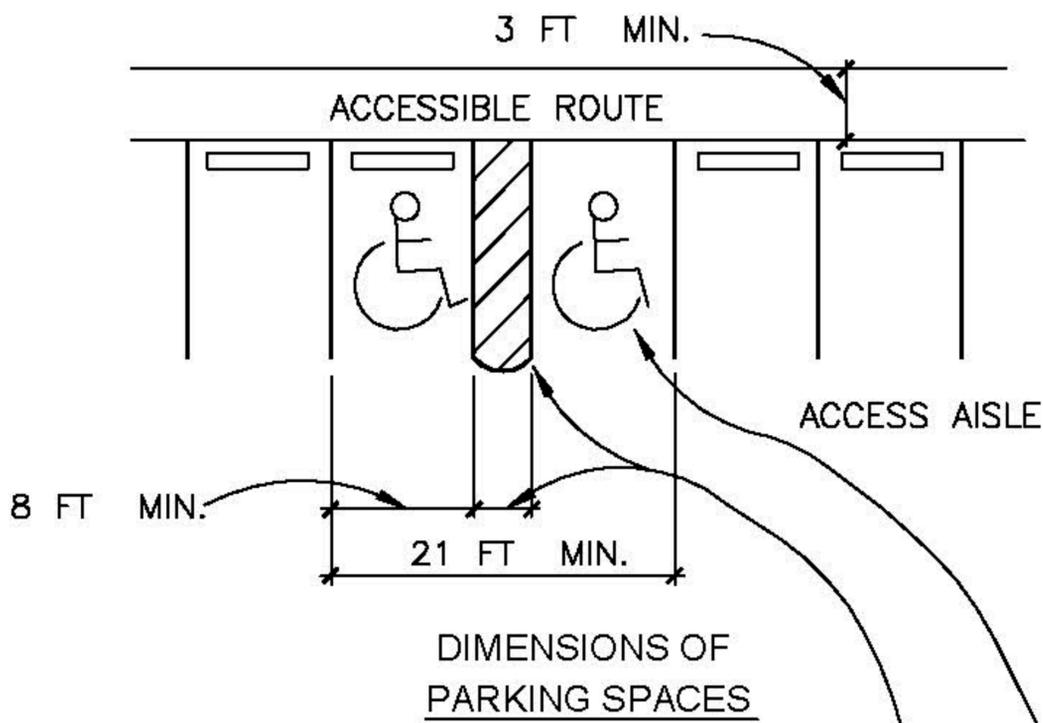

NOTE:  
 ACCESS AISLES SHALL ADJOIN AN ACCESSIBLE ROUTE. TWO PARKING SPACES SHALL BE PERMITTED TO SHARE A COMMON ACCESS AISLE. ACCESSIBLE PARKING SPACES SHALL BE PERMITTED TO HAVE ACCESS AISLES PLACED ON EITHER SIDE OF THE CAR OR VAN PARKING SPACE EXCEPT FOR ANGLED VAN PARKING SPACES. VAN PARKING SPACES THAT ARE ANGLED SHALL HAVE ACCESS AISLES LOCATED ON THE PASSENGER SIDE OF THE PARKING SPACE.

A CLEAR, VISIBLE DEPICTION OF THE INTERNATIONAL SYMBOL OF ACCESSIBILITY SHALL BE PAINTED IN BLUE ON THE PAVEMENT SURFACE. SYMBOL ON PAVEMENT IS REQUIRED.

5 FEET MINIMUM UNLESS ACCESSIBLE ACCESS (8 FEET MINIMUM REQUIRED FOR VAN ACCESSIBLE ACCESS AISLE). ACCESS AISLE SHALL BE CLEARLY MARKED BY BLUE DIAGONAL 4 INCH PAVEMENT STRIPING.

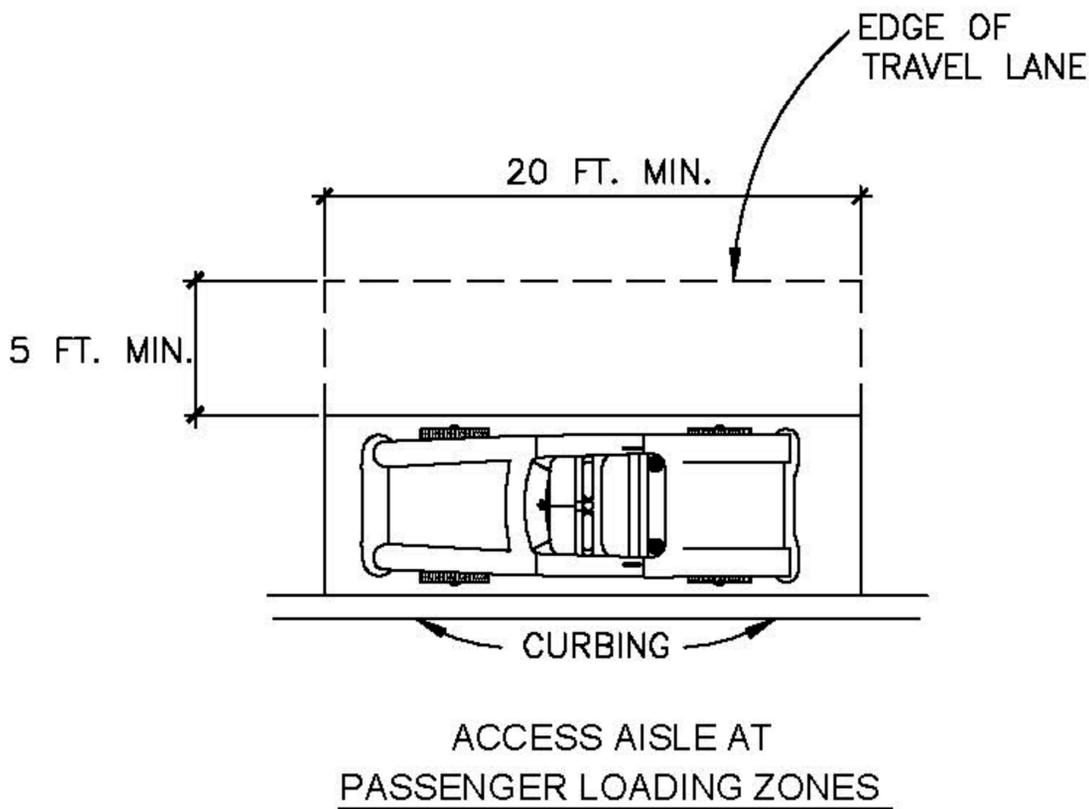

- + Minimum stall width for a single stall may be either an eight foot stall with a five foot painted access aisle, or, a single stall 13 ft. in width (no marked access aisle required).
- + Two adjacent parking spaces may share an access aisle. Two eight foot stalls with a marked five foot access aisle between.
- + Access aisles shall be a part of an accessible route to the building or facility entrance.
- + Where an accessible stall is located at the end of a row of parking stalls and where there is an accessible route on the open side, then the accessible stall may be of conventional width (9 ft. minimum).
- + Parked vehicle overhangs shall not reduce the clear width of an accessible circulation route.
- + The Community Development Director or his designee may waive or alter these requirements upon written request.